

TITO

VANITIES WALL

location:

SPECIFICATIONS:

DESCRIPTION

1-4 Light vanity luminaires featuring handcrafted glass.

LAMPING

Standard: 60W G9 Halogen 120V, suitable for dimming, lamp included. **LED:** 5W Replaceable source, 120V, dimmable, 80+ CRI, 3000° K CCT, 450 lumens, 25,000 hours, lamp included.

DIFFUSER

Handcrafted glass diffuser in Opal Matte. 3.5 L x 5.125" H

CONSTRUCTION

Stamped steel body, with plated finish. Decorative outlet box cover optional when not required.

METAL FINISH


Fixture shall be finished in Bronze, Chrome or Satin Nickel.

MOUNTING


Installs directly to a 4" octagonal outlet box, with 1.75" left or right offset. Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Wall-mount only.

LABELS


UL or ETL Listed. Suitable for Damp Locations (interior use only).

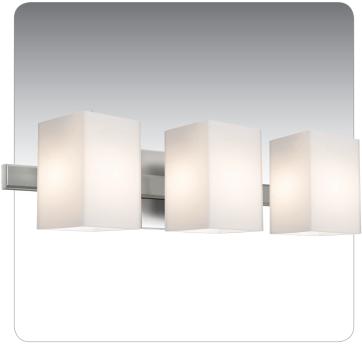

OPAL MATTE



2SW-TITO07-SN 14.625" L x 5.125" H x 5" D



3SW-TITO07-SN 22.5" L x 5.125" H x 5" D



4SW-TITO07-SN 30.375" L x 5.125" H x 5" D



All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 3/18

ORDERING:

FIXTURE	- GLASS OPTIONS - LAMP	OPTIONS - METAL FINISH
1SW 1 Lt. Sconce	TIT007 Opal Matte (blank)	60W G9 Hal BR Bronze
2SW 2 Lt. Vanity 14.625" L	LED	5W LED CR Chrome
3SW 3 Lt. Vanity 22.5"L		SN Satin Nickel
4SW 4 Lt. Vanity 30.375" L		

Ex. 2WS-TITO07-SNTito Vanity, Opal Matte Shade,
Satin Nickel Finish

